



## Balmain Battery Discount Store





16 Mansfield Street, Rozelle NSW 2039  
[www.mmbalmainauto.com.au/batteries.html](http://www.mmbalmainauto.com.au/batteries.html)  
**(02) 9555 9444 - 0425 286 700**



## Absorbed Power AGM GT12-55C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

| Battery Model                     | GT12-55C                                     |                    |                      |                    |
|-----------------------------------|--|--------------------|----------------------|--------------------|
| Designed Cycle Life               | > 350 cycles @ -0.5CA to 9.6V                |                    |                      |                    |
| Capacity (25 °C)                  | 20HR (2.8 A, 1.75V)                          | 10HR (5.5A, 1.75V) | 5HR (9.4A, 1.75V)    | 1HR (36.5A, 1.75V) |
|                                   | 56Ah   | 55Ah               | 47Ah                 | 36.5Ah             |
| Dimensions                        | Length                                       | Width              | Height               | Total Height       |
|                                   | 229mm (9.02inch)                             | 138mm (5.44inch)   | 209mm (8.23inch)     | 228mm(8.98inch)    |
| Approx. Weight                    | 17.0Kg (37.5 lbs)                            |                    |                      |                    |
| Internal Resistance               | Full charged at 25 °C: 0.006 Ohm             |                    |                      |                    |
| Self Discharge                    | 3% of capacity declined per month at (25 °C) |                    |                      |                    |
| Capacity Affected by Temp. (20HR) | 40 °C  | 25 °C              | 0 °C                 | -15 °C             |
|                                   | 102%   | 100%               | 85%                  | 65%                |
| Charge Voltage (25 °C)            | Cycle Use                                    |                    | Float Use            |                    |
|                                   | 14.4-15V(-30mV/°C), max. Current: 13.8A      |                    | 13.6-13.8(-20mV/ °C) |                    |
| CCA                               | 450  |                    |                      |                    |
| Terminal Type                     | M6 Threaded Insert                           |                    |                      |                    |

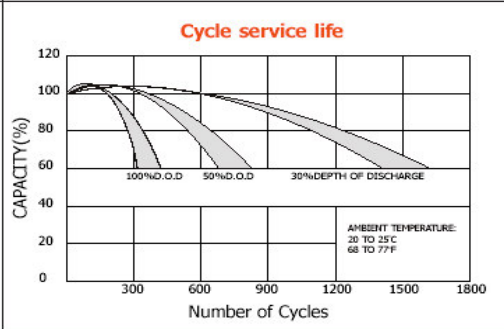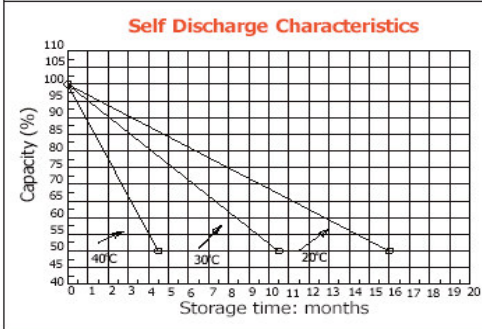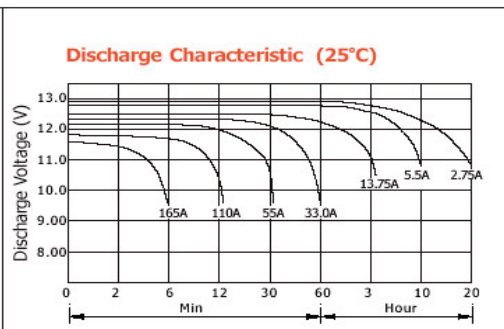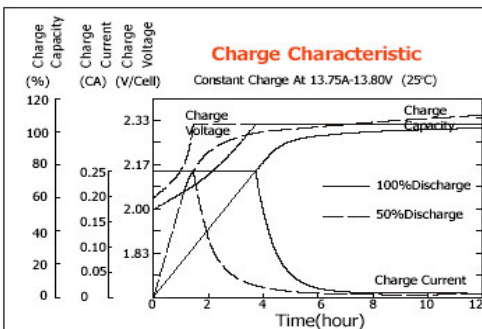

### Applications

- Car Audio
- Cruiser / Yacht
- General Marine
- House Boat
- Caravan / Camper
- Large Car
- Medium 4WD
- Medium Car
- Standby Power
- Mobility Scooter

**24 month warranty**  
**Refer to warranty**  
**policy for terms and**  
**conditions**

